

Received: 07/24/2019 Completed: 07/27/2019 Letter: R JB P.O.#: 4500029885 Test Report #: 3-33608-0-

Client's Identification Lot No.: 3012-06191. Date of Mfg.: 7/22/19. Style: SPS 152 (US/NEO/MS/EX/EP/BRK/APL). Weight: 24.9 oz/yd². Thickness: 54 mils. Product End Use: Upholstery.

Tested For: Kristi Rygh **Key Test: ASTM D 6413/MIL-STD-1623** 175
 Uniroyal Global Engineered Products
 501 South Water Street
 Stoughton, WI 53589
Tel: 1-(608)-873-6631 Ext:
Fax: 1-()- -

Category: Upholstery 12-sec Vert Specifier: MIL-STD-1623 PC: 24H /jd

TEST PERFORMED: ASTM D 6413 - Standard Test Method for Flame Resistance of Textiles (Vertical Test)

As cited by MIL-STD-1623E(SH) - Fire Performance Requirements and Approved Specifications For Interior Finish Materials and Furnishings (Naval Shipboard Use), dated 20 June 2006

PRODUCT CATEGORY: Upholstery

RESULTS:	Specimen #	Afterflame (seconds)	Char Length (inches)	Flaming Droplets (yes/no)
Length:	1	0.7	2.1	No
	2	0.7	2.0	No
	3	0.9	2.2	No
	4	0.8	2.3	No
	5	1.0	2.1	No
	Avg:	0.8	2.1	
Width:	6	0.8	2.4	No
	7	0.9	2.4	No
	8	1.1	2.2	No
	9	2.0	2.1	No
	10	1.7	2.1	No
	Avg:	1.3	2.2	

APPROXIMATE WEIGHT OF MATERIAL (as measured by Govmark): 24.9 oz/yd²

ACCEPTANCE CRITERIA: As cited by MIL-STD-1623 for upholstery coverings --

Afterflame: 2.0 seconds maximum average
 Char Length: 3.0" maximum average
 Flaming Droplets: Not permitted

CONCLUSION: Based on the above Results and Acceptance Criteria, the item tested:


Complies; Does not comply

Received: 07/24/2019	Completed: 07/27/2019	Letter: R	JB	P.O.#: 4500029885	Test Report #: 3-33608-0-
Client's Identification	Lot No.: 3012-06191. Date of Mfg.: 7/22/19. Style: SPS 152 (US/NEO/MS/EX/EP/BRK/APL). Weight: 24.9 oz/yd ² . Thickness: 54 mils. Product End Use: Upholstery.				
Tested For: Kristi Rygh	Uniroyal Global Engineered Products 501 South Water Street Stoughton, WI 53589			Key Test: ASTM D 6413/MIL-STD-1623	175
				Tel: 1-(608)-873-6631	Ext:
				Fax: 1-()- -	

REMARKS: None.

CERTIFICATION: I certify that the above results were obtained after testing specimens in accordance with the procedures and equipment specified by ASTM D 6413.

 AUTHORIZED SIGNATURE
 SGS GOVMARK
 /mqjb

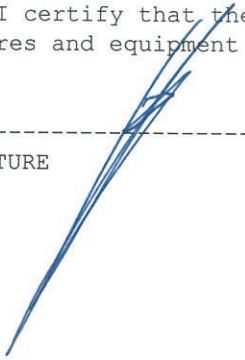

AUG 01 2019

Bobby Brown

(Page 2 of 2)