


Uniroyal Beauty Gard® Supreme Blue Jean Cleaning Instructions

Blue Jean Stain Removal

Most stains and soiling may be removed by using the simple cleaning procedures listed below:

- For light soiling, use a solution of 10% household liquid dish soap with warm water applied with a soft damp cloth. If necessary use a soft brush. Wipe area thoroughly with a clean cloth and water.
- For heavier soiling, use isopropyl alcohol wipes (70%) and wipe away residue with a clean cotton cloth, dampened with clean water and allow to air dry. If necessary, isopropyl alcohol (90% -100%) can be applied with a soft bristle brush. Wipe away residue with a clean cotton cloth, dampened with clean water and allow to air dry.

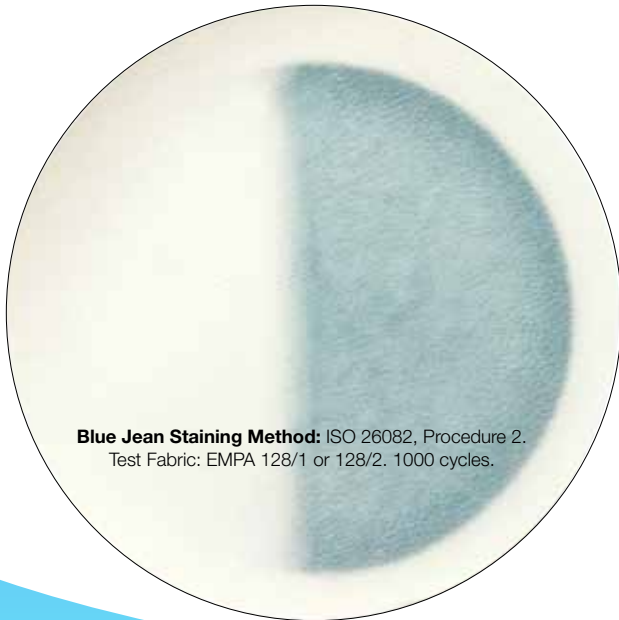

Blue Jean Staining Method: ISO 26082, Procedure 2.
Test Fabric: EMPA 128/1 or 128/2. 1000 cycles.

UNIROYAL

Uniroyal Engineered Products, LLC
The Leader in Coated Fabrics

NAUGAHYDE[®]
BRAND FABRIC

“Innovation That Matters”



National Sales Office

Uniroyal Engineered Products, LLC
1800 2nd Street, Suite 970
Sarasota, FL 34236
888-646-2542

Manufacturing

Uniroyal Engineered Products, LLC
501 South Water Street
Stoughton, WI 53589

www.naugahyde.com



ISO 9001
UNIROYAL ENGINEERED PRODUCTS, LLC

Dressing

Beauty Gard[®]
SUPREME

The Next Generation of Stain Protection

Ink

Betadine

**Cleans Up
Most Stains
with
Soap
and
Water!**

Mustard

Coffee

Lipstick



3192014

NAUGAHYDE[®]
BRAND FABRIC

UNIROYAL

Beauty Gard[®] SUPREME

The Next Generation of Stain Resistance

Protect and Preserve

Naugahyde[®] vinyls protected with Beauty Gard[®] Supreme offer a robust barrier against stains.

Beauty Gard[®] Supreme:

- Extended product appearance
- Reduced replacement costs
- Reduced maintenance time
- Increased end-user satisfaction
- Available on most Naugahyde performance vinyls.

*Beauty Gard[®] Supreme,
the next generation
of stain-resistant
top coats*

Combining Beauty and Performance

- Soap-and-water clean-up on most stains
- Stain-resistant including blood and urine
- Durability with improved abrasion-resistance
- Effective against bacterial and fungal microorganisms

Applications

Naugahyde[®] Beauty Gard[®] Supreme has been developed for optimal performance in the toughest end-user environments:

- Automotive
- Casino
- Commercial
- Corporate
- Fitness
- Health Care
- Hotels
- Marine
- Restaurants
- Residential
- Recreational Vehicles
- Transportation

Technical Information

Physical Properties

Width: 54 inches (137 cm), Length: 30 yards (27.5 m), Weight: 37.0 oz Lin./Yd (1.15 kg/m)

Flame Retardance

Spirit Supreme is inherently flame retardant and meets the requirements of the following:

- All major U.S. tests including California Fire Code 117, MVSS-302, Port Authority of NY/NJ, FAA-FAR 25.853 A, BIFMA Class I, Fed. Spec. CID A-A-2950, Boston Fire Code IX-I.

Cleaning & Disinfectability

Most stains and soiling may be removed by using the simple cleaning procedures listed below:

- For light soiling, use a solution of 10% household liquid dish soap with warm water applied with a soft damp cloth. If necessary use a soft brush. Wipe area thoroughly with a clean cloth and water.
- For heavier soiling, use isopropyl alcohol wipes (70%) and wipe away residue with a clean cotton cloth, dampened with clean water and allow to air dry. If necessary, isopropyl alcohol (90% -100%) can be applied with a soft bristle brush. Wipe away residue with a clean cotton cloth, dampened with clean water and allow to air dry.
- For the most difficult stains not removed by the procedures above, or to disinfect the surface, dampen a soft white cloth with a 10% household bleach and water solution (sodium hypochlorite). Rub stain gently. Wipe area thoroughly with a clean cloth and water. This procedure should be tested first on a hidden area of the fabric.

Performance Properties

Wyzenbeek abrasion rated at three million plus double rubs using the #8 Cotton Duck test. Spirit Supreme contains an agent to protect it against bacterial and fungal microorganisms. Other properties include: Blue Jean Stain resistance ISO 26082, Procedure 2. Test Fabric: EMPA 128/1, Sulfide Stain Resistance, Mildew Resistance, Oil Resistance, passes Ultraviolet Stable Pigment, Cold Crack: -28.9°C. Also passes CFFA141-2012 and ASTM D1308-02 (2013) including suntan lotion, wine and coffee clean-up.

NAUGAHYDE[®]
BRAND FABRIC

For specific test results or further test and cleaning information, please contact us.